
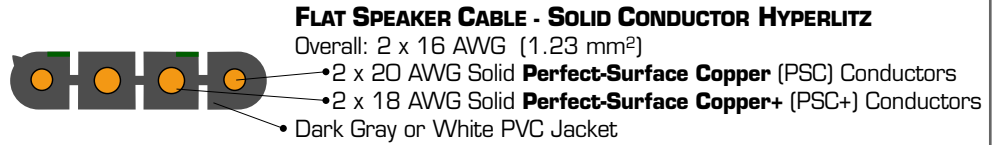


CV-1 SPEAKER CABLES: FLAT SERIES

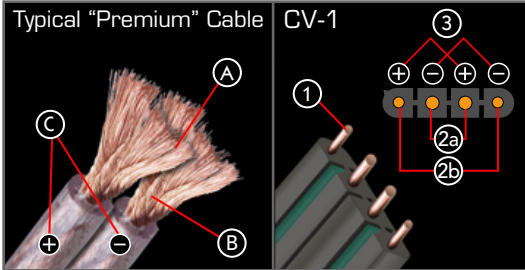

- Ⓐ Multiple Strands interact electrically and mechanically, causing irritation and one-note bass boom.
- Ⓑ “Oxygen-Free” Copper is Oxygen-Reduced, but is not selected for low distortion.
- Ⓒ High-Inductance Geometry smears sound, reduces information.
- ① Solid Conductors eliminate harshness and confusion due to strand interaction.
- ② Perfect-Surface Coppers (②a PSC and ②b PSC+) have fewer irregularities on the surface and inside, protecting clarity and sonic beauty.
- ③ Low-Inductance Geometry preserves time information, preserving dynamics and clarity.

TERMINATION DIRECTIONS: The 4 conductors of CV-1 can be easily separated and then stripped individually. Take care not to cut the conductors when stripping off ½” (12mm) of PVC jacket. Please follow the color code indicated by the 2 color stripes.

Attach the 2 color-striped conductors to a Black (-) AudioQuest CF connector (spade, BFA/Banana or UST/Banana). AQ CF connector packs include an Allen-key tool for tightening the 2 set-screws. Tighter is better. Attach the 2 un-striped conductors to a Red (+) connector.

If your speaker or amplifier has a screw-terminal or a binding post, you can insert the stripped ends of CV-1 directly. Then, screw down the connection. Tighter is better for preventing corrosion of the connection.

———— NOT INCLUDED - SOLD SEPARATELY ————



CF-BFA/BANANA



CF-SPADE



ALLEN KEY